

97147

The Center for Marine Coastal Studies – North Carolina State University

A PRELIMINARY STUDY OF STORM-INDUCED
BEACH EROSION FOR NORTH CAROLINA

By
C. E. KNOWLES
and
JAY LANGFELDER
and
RICHARD McDONALD

REPORT NO. 73-5
OCTOBER, 1973



CENTER FOR MARINE AND COASTAL STUDIES

NORTH CAROLINA STATE UNIVERSITY
RALEIGH, NORTH CAROLINA

A PRELIMINARY STUDY OF STORM-INDUCED
BEACH EROSION FOR NORTH CAROLINA

by

C. E. Knowles

and

Jay Langfelder

and

Richard McDonald

Report No. 73-5

October 16, 1973



Digitized by the Internet Archive
in 2012 with funding from
LYRASIS Members and Sloan Foundation

<http://archive.org/details/preliminarystudy00know>

A Preliminary Study of Storm-Induced Beach Erosion for North Carolina

Introduction

Storm erosion of beaches and dunes of the North Carolina coast has always occurred, but it has not been a serious economic problem until recently when increased development of beach front property has taken place. In some locations, structures have been built seaward of the (beach storm) recession line and have sustained considerable damage. This report presents the results of a study to determine the expected storm induced beach erosion which can provide preliminary information needed for coastal land management.

Preliminary beach development limits recommended in this report are based on calculated recessions of beaches for storm occurrences of one in twenty five, one in fifty, and one in a hundred year frequencies. Necessary field data were collected from fishing piers along the entire North Carolina coast except for Currituck and Hyde Counties where no piers exist. Beach recession values were calculated using essentially a semi-empirical procedure that is a modification of a technique adapted by Vallianos of the Wilmington District of the U. S. Corps of Engineers from work done earlier by Edelman (1).

Procedure

The general method employed in this study to predict storm induced beach recession involves the balancing of the areas of upland

erosion and offshore deposition due to a storm. It is assumed, therefore, that all sand eroded by the storm is deposited directly offshore or that it is moved along the shore at a steady rate; as much is coming into the area up-current as is leaving down-current. Based on field observations and model study tests (2,3) it has been determined that the offshore profile flattens by a factor of about two from its prestorm slope. The sand required for this flattening comes from the beach and dunes.

Beach profiles needed for this study were obtained, as noted earlier, from fishing piers along almost the entire North Carolina coast. Soundings (the distance from the beach and (offshore) bottom to the top of the pier) were made at closely spaced intervals, but away from the pier pillings to avoid making measurements in scour holes. Most piers were near enough to a U. S. Coast and Geodetic Survey bench-mark so that these soundings could be converted to beach profiles based on mean sea level (MSL). In those locations where established bench marks were not available, assumed elevation relative to the waterline was used. Using the time that the waterline soundings were made, elevations were converted to an estimated MSL using N.O.A.A. tide tables (4) applicable to the pier location.

The height, width and shape of the dunes at each pier location were recorded and in those locations where man-made structures changed the shore profiles, measurements of dunes characteristic of the area were used.

Storm surge levels above MSL as a function of storm return frequency were obtained (5,6,7,8,9) for the five areas of North Carolina and are shown in Figure 1 and listed in Table 1. The storm surge level is defined as the still water height that can be expected to occur once during the indicated return frequency. For the purposes of this study surge levels for storms with a once in twenty-five, fifty and one-hundred year probability of reoccurrence were used to obtain a range of beach recession values. These surge levels (S) were used to obtain the height (H) and breaking depth (H_b) of the waves associated with the storm. They were then used to calculate the associated beach recession using the modified technique of Edelman discussed in detail in the remainder of this section.

The technique (see Figure 2 for example calculation) involves plotting the before-storm beach profile and a line representing the storm surge level (S). For each of the three storm reoccurrences wave height (H) is calculated by

$$H = 1.5(S), \quad (1)$$

and the breaking depth of the wave (H_b) above the bottom is given by

$$H_b = 1.3(H). \quad (2)$$

To find the breaking depth relative to MSL (H_m), the storm surge is subtracted from H_b , i.e.,

$$H_m = H_b - S. \quad (3)$$

Values of H_m for this study are shown in Table 1. The outer limit of sand deposition is assumed to occur at a depth approximately equal to the breaking depth of the wave. The foreshore limit of off-

shore bottom slope or beach breakpoint in the before-storm profile is then found. An examination of all the profiles obtained by this study where the foreshore was clearly discernible, indicated that the breakpoint occurred at a mean depth of approximately -1.5 ft. below MSL, and a horizontal line at this depth was then drawn and acted as the pivot line along which the storm-beach profile slope changed.

Except at the two extreme ends of the storm profile, the beach and offshore slopes were flattened by a ratio of 2.1:1 compared to the original profile. As discussed earlier this flattening was determined from model study tests for storm waves. In constructing the storm-beach profile from a pre-storm multi-sloped beach, it was necessary to establish a procedure for selecting the locations at which the storm profile would change. Landward of and including the breakpoint pivot line, all storm-beach slopes change at a 2.1 to 1 ratio on a line drawn vertically from the point where the pre-storm profile changes slope, as shown in Figure 2.

The dune characteristics that were measured during this study may be classified in three ways. First, the dune will be sufficiently high and wide to remain above the storm surge level during the erosion process. Secondly, the top of the dune will be above the storm surge initially, but will be below the storm surge as erosion of the dune progresses, and thirdly, the dune will be below the storm surge level initially so that the dune will be overtopped throughout the entire erosion process.

For the first classification the 2.1:1 storm profile line will intersect storm surge level below the top, and a 10(V):1(H) slope is drawn from this intersection to the top of the dune. Under the second and third classifications the storm profile will not intersect storm surge level so the storm profile retains its 2.1:1 ratio of the original until it intersects the back side of the dune.

Finally, to determine the storm-beach profile it was necessary to match the area of erosion with the area of deposition as shown in Figure 2. A planimeter was used to measure areas and the storm profile lines were adjusted until the erosion and deposition areas were equal.

For the second and third conditions it is apparent that with overtopping of the dune not all sand eroded by the storm will be deposited offshore, as assumed by this procedure and more erosion will actually occur than is predicted by this technique. This additional erosion at overwash areas has not been considered in the calculations. Finally, a measure of the recession of the beach due to the storm from a relatively fixed and identifiable point was made. The measurement of the extent of storm damage was taken as the distance from the seaward toe of the dune to the landward point at which the storm profile crossed the original profile. The recession values for each pier location are shown in Table 2. The measurements from the toe of the dune were chosen to express the range of recession for the reoccurring storms, because this point was judged to be the most stable and most easily identified.

Results and Discussion

The calculated storm recessions for each of the 29 piers that were analysed are presented in Table 2. This table not only indicates the amount of anticipated recession but presents information on the dune characteristics in the area. The calculated values of storm erosion depend on several factors; first, the storm surge level that can be expected for the various reoccurrence frequencies, secondly, the height and massiveness of the dune at each location and thirdly, the distance of the dune from the mean water line. The affects of these factors can readily be noted in the data presented in Table 2.

From the results of Table 2 recommended ranges of recession lines along the North Carolina coast are presented in Table 3 and in Figures 3 and 4 for reoccurrence frequencies of one in twenty five years and one in a hundred years. These recommended ranges were obtained by weighting the various data according to the degree of reliability that could be assumed for each of the individual pier locations. Thus, for pier locations where the elevations were obtained from estimates of the water level obtained from N.O.A.A. tide tables, less weight was given to the results than for those which were obtained from U.S.G.S. bench-marks. At several of the pier locations there were sea walls constructed and in those areas no adjustment was made for the difference in erosion affect at the sea wall. Also, the toe of the dune at three locations was unidentifiable or was found to be below or very near the mean high water level.

Although the ranges presented in Table 3 are based on a semi-empirical method and are somewhat preliminary, they represent a reasonable estimate of storm induced beach erosion limits. They are recommended for use in coastal zone management as preliminary criteria for establishing a dynamic zone.

The above results must be considered preliminary since the present profiles were only taken where piers exist and then only at a single time during the summer. Additional precision could obviously be obtained by securing additional profiles during other times in the year. In addition, in areas where piers are not located, profiles should be obtained by soundings from a boat.

The storm induced recession prediction presented in this report is considered to be useful for determining the distance from the toe of the primary dune in which any structures might be considered to be in danger. However, if a building set back line is to be established, additional factors such as long time erosion, continuity of the dunes, size and shape of the dunes, potential for overwash and other existing features should be considered. This type of information would require a more detailed study than was undertaken in the present report. However, such information can be obtained, and by combining all of this information a reasonable set back line could be established that would provide some guidance for development of our beach front areas.

Acknowledgment

This study was supported in part, by the Department of Natural and Economic Resources of the State of North Carolina. The field

work was able performed by Bruce Harvey, Cid Carrilho and John Holliday of the Department of Geosciences of North Carolina State University.

References

1. Edelman, T. - Dune Erosion During Storm Conditions, Proceedings Of Eleventh Conference On Coastal Engineering, London, England, September 1968.
2. Rector, Ralph L. - Laboratory Study Of Equilibrium Profiles Of Beaches, Beach Erosion Board Technical Memorandum No. 41, August, 1954.
3. Noda, Edward K. - Coastal Movable-Bed Scale-Model Relationship, Final Report Prepared For U. S. Army Coastal Engineering Research Center, Tetra Tech., Inc., March 1971.
4. Tide Tables - High And Low Water Predictions-East Coast Of North And South America U. S. Department of Commerce, National Oceanic And Atmospheric Administration, National Ocean Survey, 1973.
5. "Outer Banks Between Virginia State Line And Hatteras Inlet, N. C." Interim Survey Report Of Hurricane Protection, U. S. Army Corps Of Engineers, Wilmington, N. C. District April, 1965.
6. "Ocracoke Inlet To Beaufort Inlet, North Carolina" Interim Survey Report Of Hurricane Protection, U. S. Army Corps Of Engineers, Wilmington, N. C. District, December, 1964.
7. Tide Level - Frequency Analysis For Ocean Shore Of Bogue Banks, North Carolina.
National Oceanic And Atmospheric Administration National Weather Service. July 18, 1972 (An Analysis Made At The Request Of U.S. Army Corps Of Engineers, Wilmington, North Carolina District).
8. Survey Report Of Hurricanes, Carolina Beach, N.C., And Vicinity, And Cooperative Beach Erosion Control Study, Carolina Beach, North Carolina Damage Benefit Analysis Data. U. S. Army Corps Of Engineers Wilmington, North Carolina District September 1960.
9. Brunswick County Beaches, North Carolina
General Design Memorandum, Phase I, Yaupon And Long Beaches
July 19, 1973.

Table 1. Storm stillwater surge levels and breaking depth of waves for one in a twenty-five, fifty, and one hundred years storm return frequency, respectfully.

	<u>SURGE LEVEL(S) (+Ft.MSL)</u>			<u>BREAKING DEPTH(H_m) (-Ft.MSL)</u>		
	<u>1/25</u>	<u>1/50</u>	<u>1/100</u>	<u>1/25</u>	<u>1/50</u>	<u>1/100</u>
Virginia To Cape Hatteras	7.43	8.20	8.80	7.06	7.79	8.36
Cape Hatteras To Cape Lookout	7.10	7.63	8.00	6.75	7.25	7.60
Cape Lookout To New River Inlet	7.63	9.33	10.95	7.25	8.86	10.40
New River Inlet To Cape Fear	8.80	10.55	12.05	8.36	10.02	11.45
Cape Fear To South Carolina	9.67	11.23	12.45	9.19	10.67	11.83

Table 2. Results of beach recession study for North Carolina Coastline

County and Pier Name	Dune Height (ft. above MSL)	Toe of Dune Height(ft) from MSL	Dist. from MHW(ft)	Recession from toe of dune (ft) for three storms with specific return frequencies in years	1/25	1/50	1/100
<u>Dare County</u>							
Kitty Hawk	19.6	12.1	215	11	34	54	
Avalon	18.5	9.3	150	40	70	94	
Nags Head	22.9	7.6	112	94	107	126	
Outer Banks *	30.0	4.1	75	69	73	78	
Hatteras Island	21.7	2.2	102	99	104	108	
Cape Hatteras *	24.0	8.8	61	57	66	74	
<u>Carteret County</u>							
Triple Ess	22.0	4.3-9.6	24	91	114	161	
Oceana	21.7	5.9	83	101	132	168	
Iron Steamer	15.7	6.4	136	80	95	106	

*Elevation's assumed and corrected to estimated MWL using N.O.A.A. Tide Tables

Table 2 continued

County and Pier Name	Dune Height (ft. above MSL)	Toe of Height (ft) from MSL	Dist. from MHM (ft)	Recession from toe of dune (ft) for three storms with specific return frequencies in years
<u>Carteret County</u>				
Emerald Isle *	24.0	6.6	83	66 74 98
Bogue Island *	16.0	8.9	158	21 162 220
<u>Onslow County</u>				
McKee's *	11.0	4.7	78	95 108 134
Paradise	14.1	10.5	173	143 189 223
Ocean City *	12.3	7.0	113	161 206 229
<u>Pender County</u>				
Scotch Bonnet *	23.0	9.4	154	133 144 178

*Elevation's assumed and corrected to estimated MWL using N.O.A.A. Tide Tables

Table 2 continued

County and Pier Name	Dune Height (ft. above MSL)	Toe of Height (ft) from MSL	Dune Dist. from MHW (ft)	Recession from toe of dune (ft) for three storms with specific return frequencies in years	1/25	1/50	1/100
<u>Pender County</u>							
Surf City	25.0	5.6	98	113	186	227	
Dolphin	28.3	7.7	114	103	120	188	
Ocean	17.9	8.2	103	99	178	234	
<u>New Hanover County</u>							
Johnny Mercer	14.0	5.7	112	165	175	180	
Crystal *	15.4	6.4	112	123	145	194	
Carolina Beach	10.4	Wa11 (Rock) 4.1-11.3	23	264	347	363	
Center	12.9			153	206	270	
Kure *	12.8	Wa11 12.5-18.5	109	74	124	144	

*Elevation's assumed and corrected to estimated MWL using N.O.A.A. Tide Tables

Table 2 continued

County and Pier Name	Dune Height (ft. above MSL)	Toe of Dune Height(ft) from MSL	Dist. from MHW(ft)	Recession from toe of dune (ft) for three storms with specific return frequencies in years
				1/25 1/50 1/100
<u>Brunswick County</u>				
Yaupon *	10.7	2.1	2	175 227 237
Ocean Crest *	12.9	8.0	87	83 101 116
Long Beach	16.7	8.5	105	142 175 192
Holden Beach *	14.9	9.9	157	199 220 265
Ocean Isle *	14.9	None		120 134 150

*Elevation's assumed and corrected to estimated MWL using N.O.A.A. Tide Tables

Table 3. Recommended range of recession lines from the dune toe for one in twenty five and one in a hundred years storm return frequency

<u>Location</u>	<u>Range of recession lines (ft)</u>	
	<u>1/25 frequency</u>	<u>1/100 frequency</u>
I Virginia to Cape Hatteras	40-100	80-120
II Cape Hatteras to Cape Lookout (one value)	50-100	70-120
III East-West Portion to Carteret County	70-100	100-170
IV Onslow County	100-160	130-230
V Pender County	100-140	180-230
VI New Hanover County	120-170	180-270
VII Brunswick County	120-190	150-260

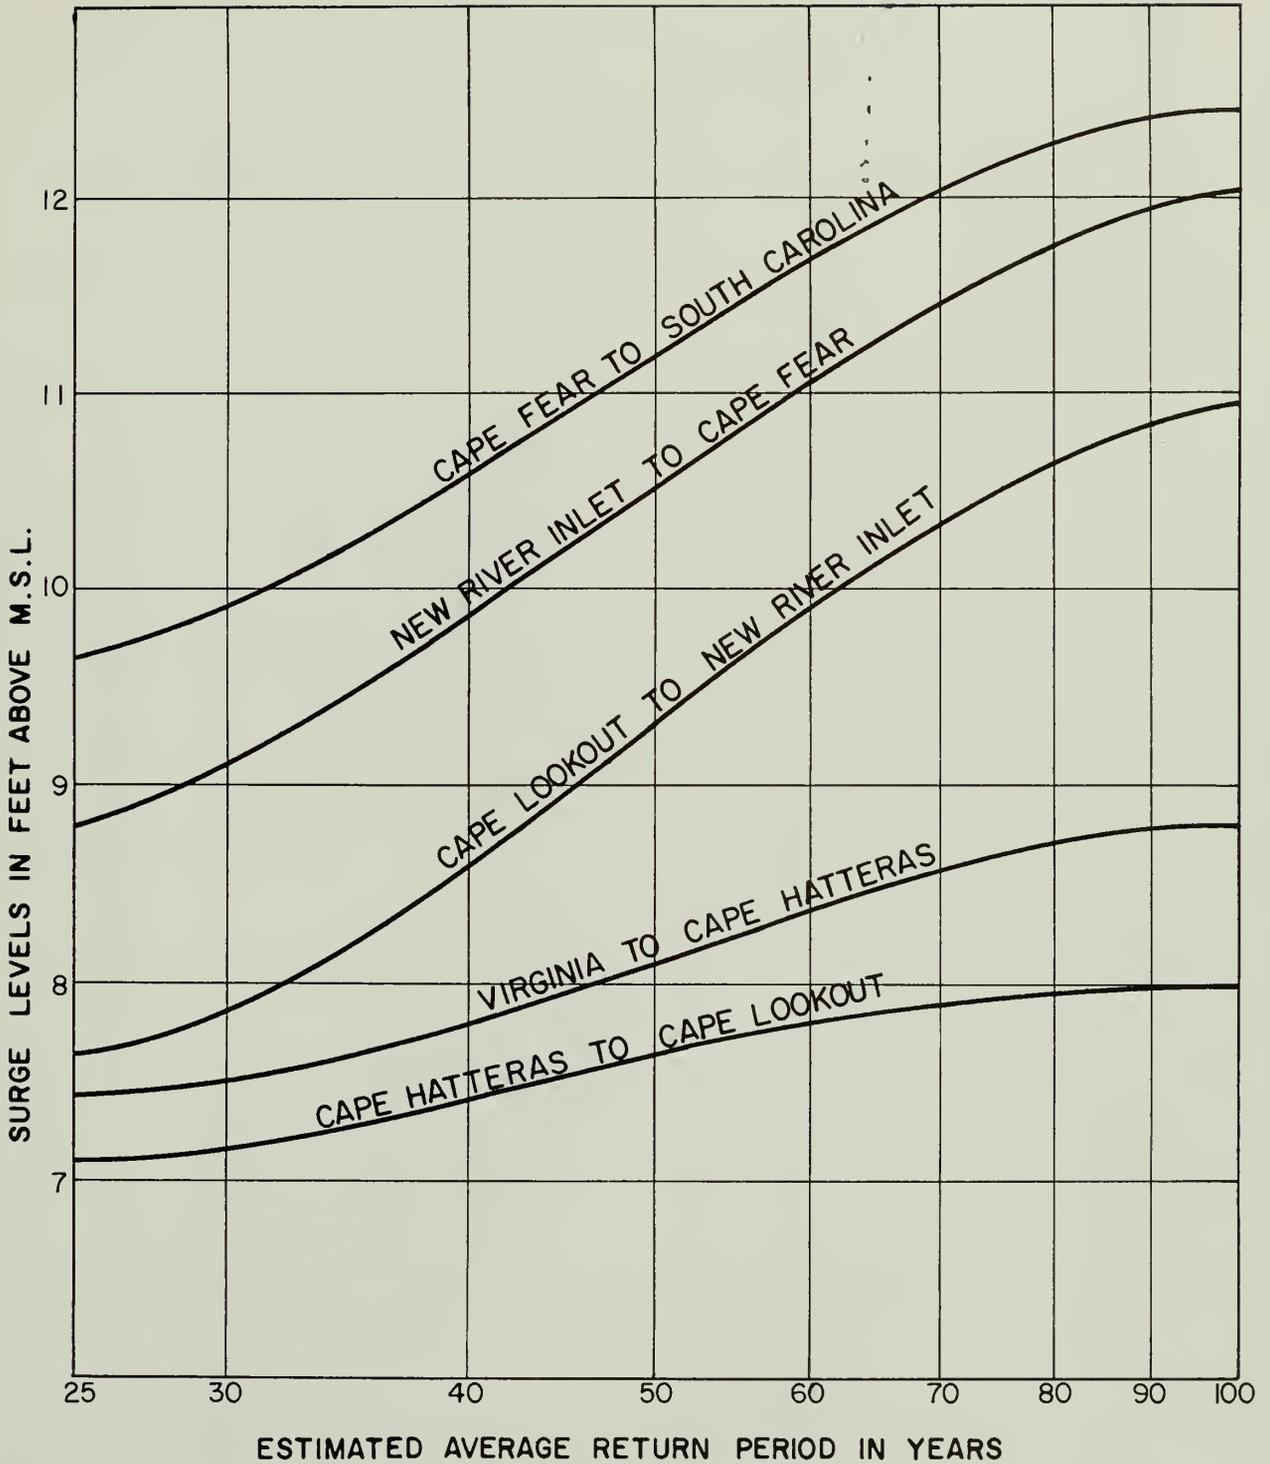


Figure 1. Storm surge levels related to return frequencies for five subdivisions of the North Carolina Coast.

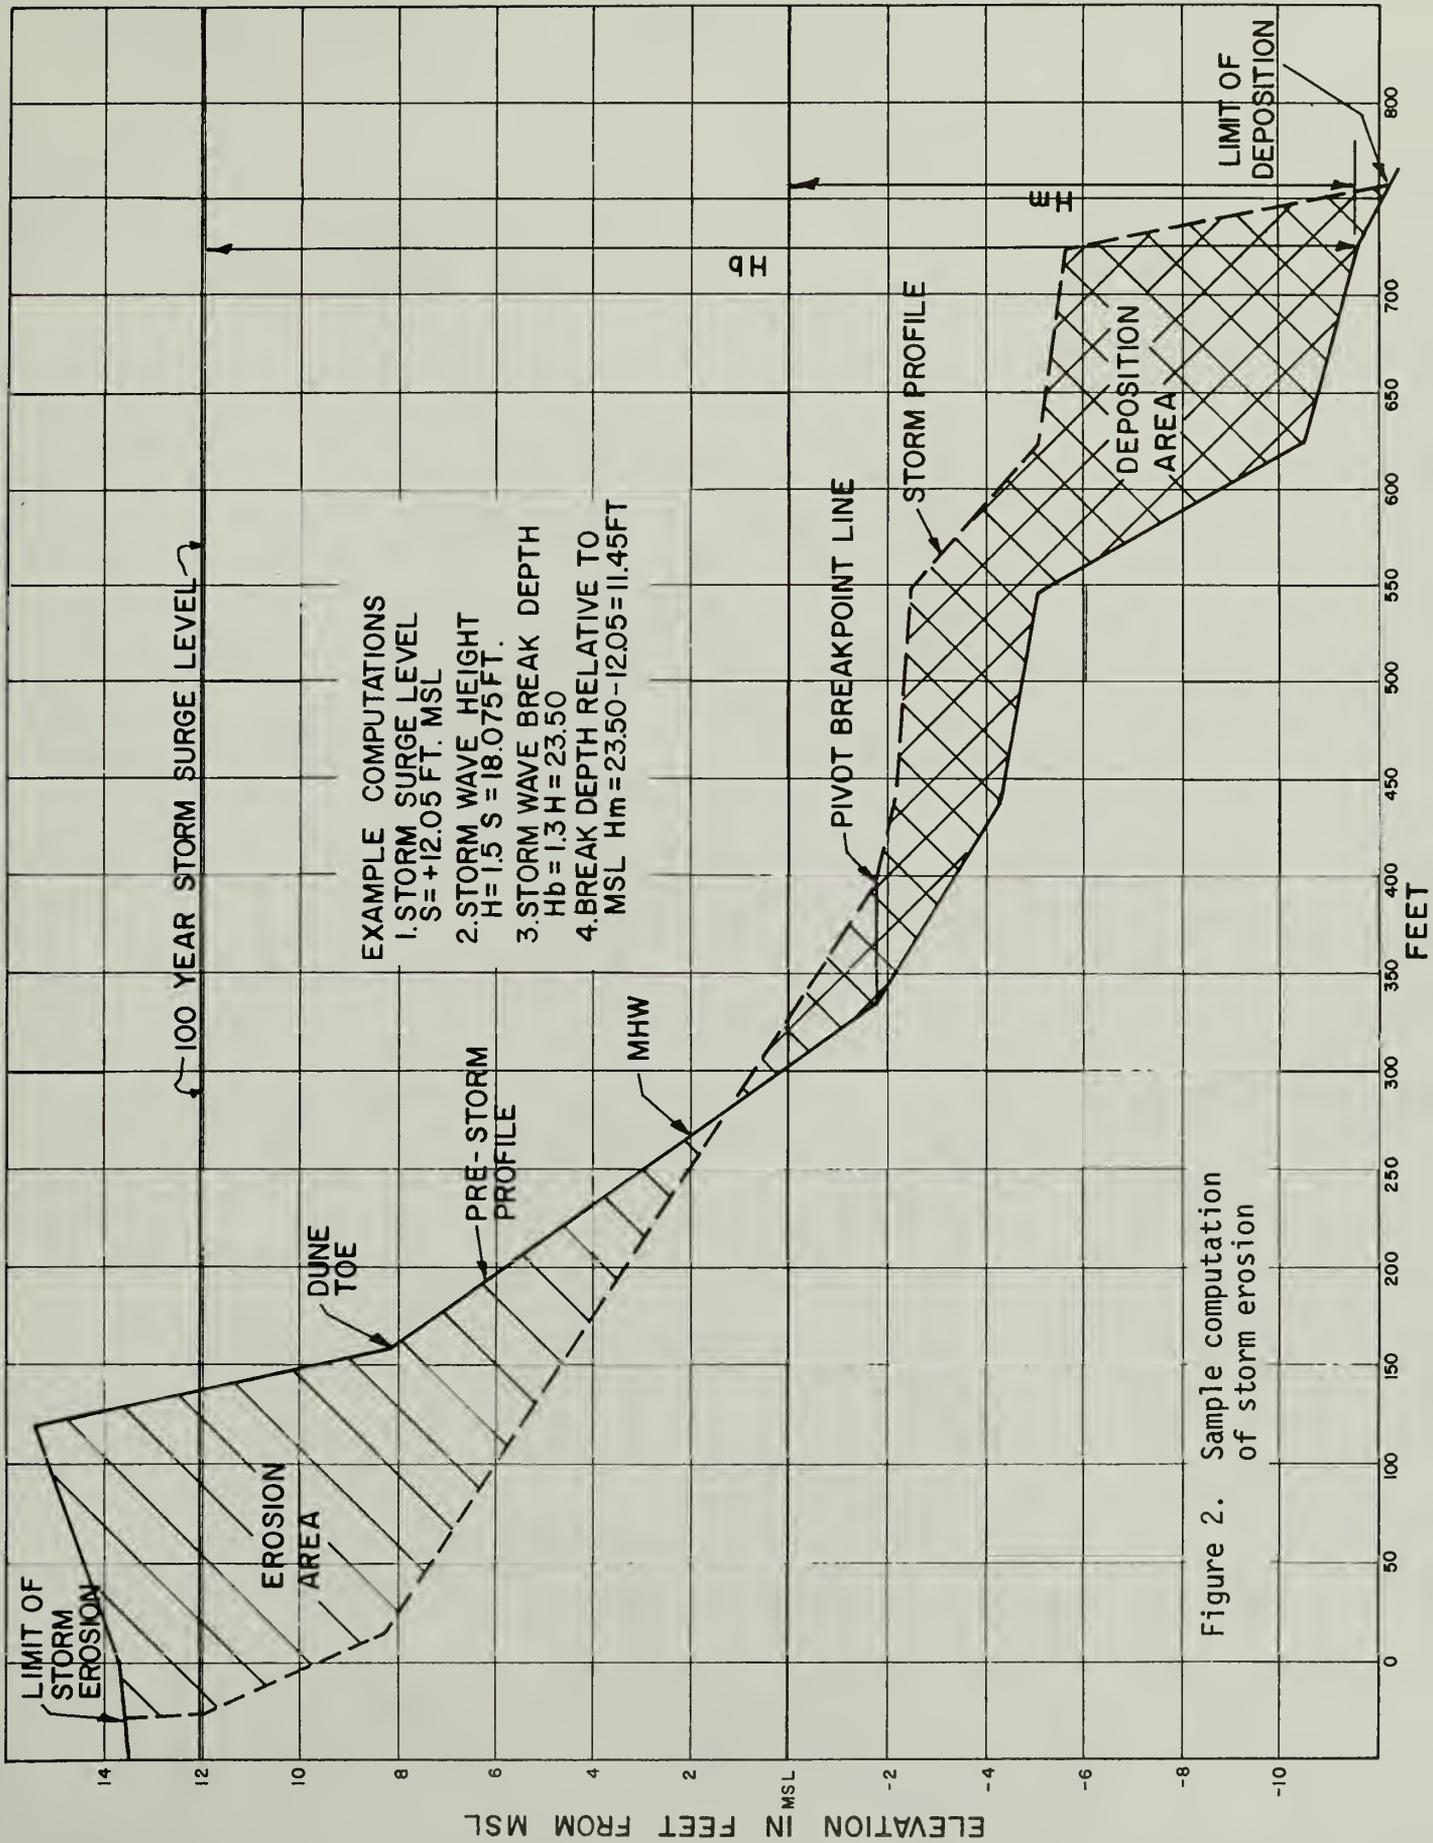


Figure 2. Sample computation of storm erosion




COI

SOUTH CAROLINA

Figur



Figure 3. Recommended range of recession lines from the dune toe for one in twenty five years storm return frequency

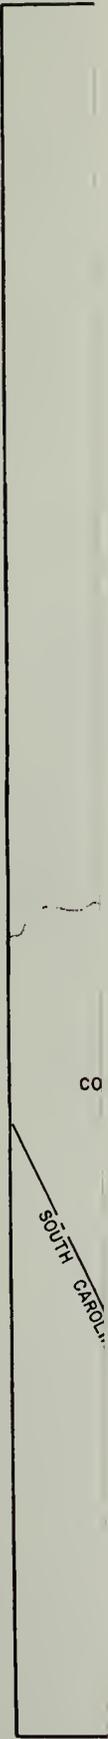

CO

SOUTH CAROLINA

Figur



Figure 4. Recommended range of recession lines from the dune toe for one in a hundred years storm return frequency

